


# HMM (Y2) 系列 M (铁壳) 电机 B3 外型及安装尺寸

## HMM (Y2) SERIES M (CAST-IRON BODY) MOTOR B3 MOUNTING & OVERALL DIMENSIONS

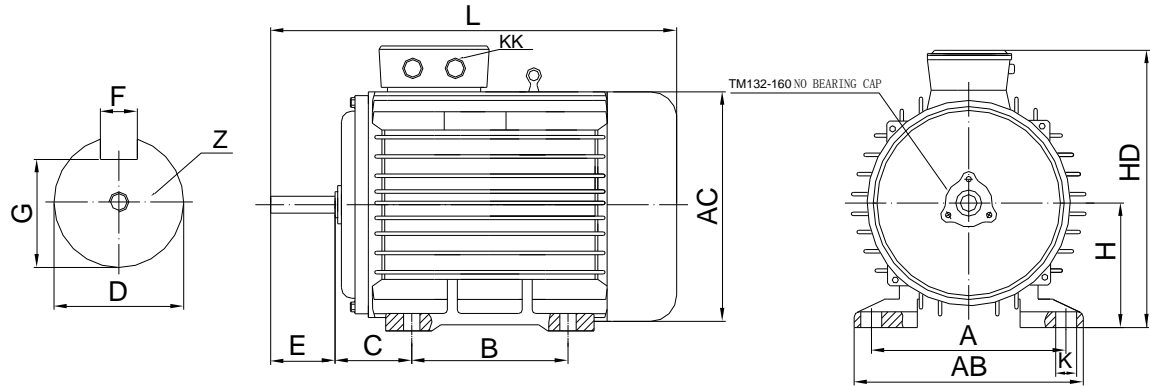

Type	Pole	MOUNTING DIMENSIONS											OVERALL DIMENSIONS			
		A	B	C	D	E	F	G	H	K	Z	KK	AB	AC	HD	L
M132S	2.4.6.8P	216	140	89	38	80	10	33.3	132	12	M12×28	2-M32×1.5	248	265	340	470
M132M	2.4.6.8P	216	178	89	38	80	10	33.3	132	12	M12×28	2-M32×1.5	248	265	340	500
M160M	2.4.6.8P	254	210	108	42	110	12	37	160	15	M12×28	2-M40×1.5	315	330	420	605
M160L	2.4.6.8P	254	254	108	42	110	12	37	160	15	M12×28	2-M40×1.5	315	330	420	680
M180M	2.4.6.8P	279	241	121	48	110	14	42.5	180	15	M12×28	2-M40×1.5	350	352	445	694
M180L	2.4.6.8P	279	279	121	48	110	14	42.5	180	15	M12×28	2-M40×1.5	350	352	445	732
M200L	2.4.6.8P	318	305	133	55	110	16	49	200	19	M20×42	2-M50×1.5	390	394	515	774
M225S	4.8P	356	286	149	60	140	18	53	225	19	M20×42	2-M50×1.5	435	442	560	820
M225M	2P	356	311	149	55	110	16	49	225	19	M20×42	2-M50×1.5	435	442	560	813
M225M	4.6.8P	356	311	149	60	140	18	53	225	19	M20×42	2-M50×1.5	435	442	560	873
M250M	2P	406	349	168	60	140	18	53	250	24	M20×42	2-M63×1.5	490	481	625	922
M250M	4.6.8P	406	349	168	65	140	18	58	250	24	M20×42	2-M63×1.5	490	481	625	922
M280S	2P	457	368	190	65	140	18	58	280	24	M20×42	2-M63×1.5	547	550	680	991
M280S	4.6.8P	457	368	190	75	140	20	67.5	280	24	M20×42	2-M63×1.5	547	550	680	991
M280M	2P	457	419	190	65	140	18	67.5	280	24	M20×42	2-M63×1.5	547	550	680	1040
M280M	4.6.8P	457	419	190	75	140	20	67.5	280	24	M20×42	2-M63×1.5	547	550	680	1040
M315S	2P	508	406	216	65	140	18	58	315	28	M20×42	2-M63×1.5	630	600	855	1160
M315S	4.6.8.10P	508	406	216	80	170	22	71	315	28	M20×42	2-M63×1.5	630	600	855	1190
M315L	2P	508	508	216	65	140	18	58	315	28	M20×42	2-M63×1.5	630	600	855	1190
M315L	4.6.8.10P	508	508	216	80	170	22	71	315	28	M20×42	2-M63×1.5	630	600	855	1300